

The Affordable Tabbing Solution



Secap[®] 1012 **Tab & Label Affixer**

It Pays to Tab!

Economical and efficient, the Secap[®] 1012 Tabber automatically applies adhesive tabs and wafer seals to open-ended mail in accordance with postal regulations.

- **Fast** – Applies tab/wafer seals at production speeds
- **Reliable** – Consistent, accurate application. Rugged design and proven performance.
- **Versatile** – Accepts roll or fan-folded label stock. Operates as a high speed pressure sensitive labeler, too.

Seal Open-Ended Mail At High Speeds Without The Cost Of In-Line Tabbing.

Preparing your mail with the Model 1012 is cost effective. This off-line system affixes tabs/wafer seals on open-ended mail to maintain your postage discounts. Consistently and accurately it seals tri-folded stock, double postcards, newsletters and booklets (up to 1/4" thick) at production speeds averaging 15,000 pieces per hour. The 1012 also doubles as a label affixer, applying pressure sensitive address labels up to 25,000 pieces per hour.

The 1012 sets up fast for a smooth operation. Switching between different applications is a snap! Quality engineered components assure uninterrupted performance and minimal downtime. Convenient and versatile, the 1012 is the preferred tabletop tabbing solution for postal automation compatibility.

Technical Specifications Model 1012 Tab & Label Affixer

- **Speed (Variable):**
 - Tab/Wafer Seals:** Up to 19,000/hr.
 - Address Labels:**
 - #10 Envelopes: Up to 25,000/hr.
 - Postcards: Up to 25,000/hr.
 - 9" x 12" flats: Up to 12,000/hr.
- **Media Size:**
 - Length: 3" to 18"
 - Width: 6" to 15"
 - Thickness: 1/4"
- **Tab Size:**
 - Length: 3/4" to 1-1/2"
 - Width: 1/2" to 2"
- **Wafer Seal Size:**
 - 3/4" to 1-1/2" diameter
- **Label Size:**
 - Accepts most standard pressure sensitive labels
- **Label Sensitivity Control:**
 - Adjusts to seal or label stock density
- **Light Indicators:** For Media and Tab/Label Out
- **Labeler Zip Code Sort:** Switch selectable sensor
- **Hopper:** Continuous feed; large volume capacity (varies with media)
- **Counter:** Resettable 5-digit LCD
- **Physical Characteristics:**
 - Dimensions: 16.5"W x 19"H x 18"L
 - Weight: 70 lbs./26 kg
 - Power: 110V/60 Hz, 2 Amp (220V/50 Hz available)

(Speeds may vary depending on media and tab/wafer size.)

(Specifications subject to change without notice.)

Easily Tabs Your Outgoing Mail . . .

Flyers
Newsletters
Self-Mailers

Double Postcards
Tri-Folded Stock
Booklets, *And more!*

The 1012 doubles as a label affixer applying pressure sensitive labels from rolls or fan-folded stock.




Handles tab and wafer seals on roll.

Handles a wide variety of media of substantial length, width and thickness.

Spring-loaded brake and registration maintains tension and minimizes slippage.

Applies one or two tabs/wafer seals in accordance with postal regulations. (one tab/wafer seal per pass.)

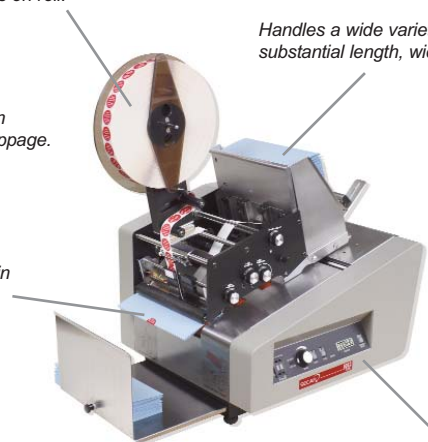

Easy to read control panel, keeps accurate count of mail pieces.



Mail Stream Management and Solutions...

10 Clipper Road
W. Conshohocken, PA 19428-2721
1.800.523.0320 • 610.825.6205 • 610.825.1397 (fax)
www.secap.com

Reorder #40400 7/05

Ask about Secap's complete line of mail stream solutions including a full line of folder inserters, inkjet address printers, both desktop and production systems, mailing and shipping software, tabbers and other mail related products and services.

Available from your authorized and certified Secap dealer:

Automation Mailing & Shipping Solutions
1138 West Ninth Street
Cleveland, OH 44113-1060
(216) 241-4487 Fax: (216) 241-5918
www.mailshipsolutions.com

Contact the dealer above or call 800.523.0320 for a Secap dealer near you.